




Bullet Male & Female Disconnects

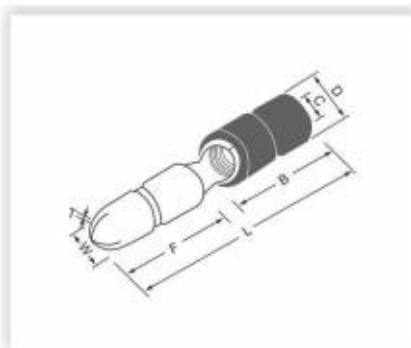


Material

- Insulation : Vinyl
- Terminal Body : Brass
- Metallic Sleeve : Copper
- Plating : Tin



Specifications of Bullet-Male Quick Disconnects

WIRE RANGE mm ² (A.W.G.)	DIMENSION mm(inch)				COLOR
	W	L	B	C	
0.5-2.5(22-16)	4.0(.157)	21.5(.846)	10.5(.413)	1.7(.067)	Red
1.5-2.5(16-14)	4.0(.157)	21.7(.854)	10.5(.413)	2.3(.091)	Blue
	5.0(.197)	21.2(.835)			
4-6(12-10)	5.0(.197)	24.0(.945)	13.0(.512)	3.4(.134)	Yellow

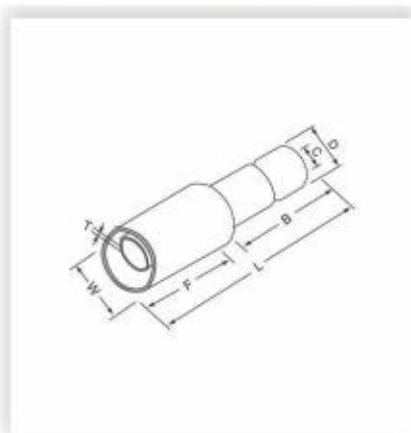

Material

- Insulation : Vinyl
- Terminal Body : Brass
- Metallic Sleeve : Copper
- Plating : Tin



Specifications of Bullet-Female Quick Disconnects

WIRE RANGE mm ² (A.W.G.)	DIMENSION mm(inch)				COLOR
	W	L	B	C	
0.5-2.5(22-16)	3.9(.153)	23.3(.917)	10.5(.413)	1.7(.067)	Red
1.5-2.5(16-14)	3.9(.153)	23.3(.917)	10.5(.413)	2.3(.091)	Blue
	4.9(.193)				
4-6(12-10)	4.9(.193)	25.1(.988)	12.5(.492)	3.4(.134)	Yellow