




Nylon Convoluted Tubes

Nylon Convoluted Tubes are applicable for Temperature between -40°C to 85°C, Resistance to Solvents, liquid-tight, or with silicon cover-no matter which protective system you require. This product is using in mechanical engineering sector, wind power station or automotive sector.

PA Flexible Conduits

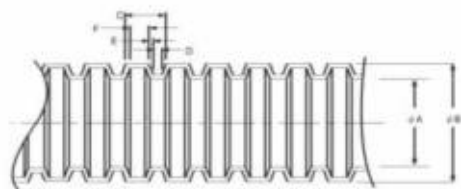


- Applicable on electrical, machinery, and building harness wiring.
- Flexibility for installation while providing protection to cables.
- Fluid resistance.
- Material : Polyamide 6, UL 94 V2
- Color: Black



Specification of PE Flexible Conduits

Nominal Dimension		In-Diameter	Outer-Diameter	C	D	E	F
mm	inch	A (mm)	A (mm)	(mm)	(mm)	(mm)	(mm)
6.35	1/4"	Ø6.8±0.4	Ø10.0±0.4	2.72	0.60	0.30	1.52
7.94	5/16"	Ø9.6±0.4	Ø13.0±0.4	2.93	0.60	0.30	1.75
9.53	3/8"	Ø12.0±0.4	Ø15.8±0.4	3.18	0.70	0.30	1.88
12.70	1/2"	Ø16.2±0.4	Ø21.2±0.4	3.46	0.61	0.40	2.05
19.05	3/4"	Ø21.9±0.4	Ø28.5±0.4	4.76	0.75	0.50	3.01
25.40	1"	Ø27.6±0.4	Ø34.5±0.4	4.76	0.85	0.60	2.71
31.75	1 1/4"	Ø36.0±0.4	Ø42.5±0.4	6.35	1.15	0.75	3.70
50.80	2"	Ø47.0±0.4	Ø54.5±0.4	6.35	1.10	0.75	3.75

Specification of PE Flexible Conduits

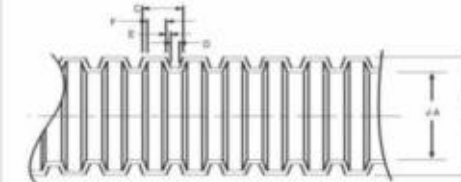

- Applicable on electrical, machinery, and building harness wiring.
- Flexibility for installation while providing protection to cables.
- Fluid resistance.
- Material : PE
- Color: Black, Other colors are also available.



Nominal Dimension		In-Diameter	Outer-Diameter	C	D	E	F
mm	inch	A (mm)	A (mm)	(mm)	(mm)	(mm)	(mm)
6.35	1/4"	Ø6.8±0.4	Ø10.0±0.4	2.72	0.60	0.30	1.52
7.94	5/16"	Ø9.6±0.4	Ø13.0±0.4	2.93	0.60	0.30	1.75
9.53	3/8"	Ø12.0±0.4	Ø15.8±0.4	3.18	0.70	0.30	1.88
12.70	1/2"	Ø16.2±0.4	Ø21.2±0.4	3.46	0.61	0.40	2.05
19.05	3/4"	Ø21.9±0.4	Ø28.5±0.4	4.76	0.75	0.50	3.01
25.40	1"	Ø27.6±0.4	Ø34.5±0.4	4.76	0.85	0.60	2.71
31.75	1 1/4"	Ø36.0±0.4	Ø42.5±0.4	6.35	1.15	0.75	3.70
50.80	2"	Ø47.0±0.4	Ø54.5±0.4	6.35	1.10	0.75	3.75