




GLOBAL MOTIVE GROUP

Your Global Partners for Success

Piggy Back Quick Disconnects

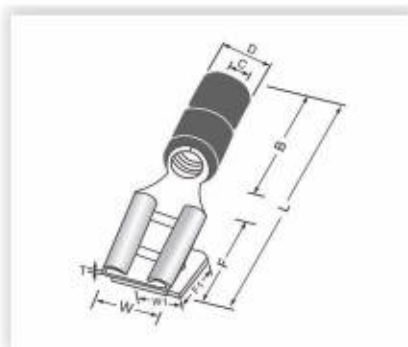

Material

- Insulation : Heat Shrink Tube
- Terminal Body : Copper
- Metallic Sleeve : Brass
- Plating : Tin



Specifications of Piggy Back Quick Disconnects

WIRE RANGE mm ² (A.W.G.)	NEMA TAB		DIMENSION mm(inch)						COLOR
	Thickness	Width	W	W1	L	B	C	T	
0.5-1.5 (22-16)	0.8×6.35	.032×.250	6.6(.260)	6.35(.250)	22.5(.886)	10.5(.413)	1.7(.067)	0.4(.016)	Red
1.5-2.5 (16-14)	0.8×6.35	.032×.250	6.6(.260)	6.35(.250)	22.5(.886)	10.5(.413)	2.3(.091)	0.4(.016)	Blue
4-6 (12-10)	0.8×6.35	.032×.250	6.6(.260)	6.35(.250)	24.0(.945)	13.0(.512)	3.4(.134)	0.4(.016)	Yellow

• www.globomotive.com
• sales@globomotive.com

INDIA Office: +91 886 600 1604 | U.S.A Office: +1 678 561 5760
U.K Office : +44772 341 4162 | China Office: +8613775114290