




GLOBOMOTIVE GROUP

Your Global Partners for Success

Vinyl Insulated - Double Crimp

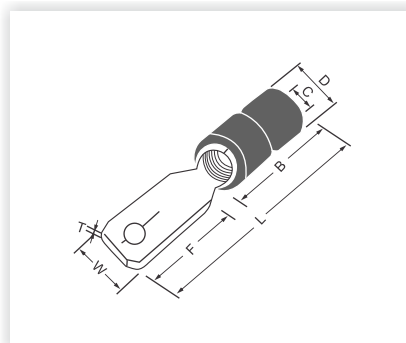

Material

- Insulation : Vinyl
- Terminal Body : Brass
- Metallic Sleeve : Copper
- Plating : Tin

Character:

- Heat Resistance 105°C



Male Quick Disconnects

WIRE RANGE	NEMA TAB		DIMENSION mm(inch)					COLOR
mm ² (A.W.G.)	Thickness × Width		W	L	B	C	T	
0.5-1.5 (22-16)	0.5×2.8	.020×.110	2.8(.110)	19.2(.756)	10.5(.413)	1.7	0.5(.020)	
	0.8×2.8	.032×.110					0.4(.016)	
	0.5×4.75	.020×.187	4.8(.189)	19.8(.780)			0.5(.020)	
	0.8×4.75	.032×.187					0.4(.016)	
	0.8×6.35	.032×.250	6.35(.250)	21.8(.858)				
1.5-2.5 (16-14)	0.5×4.75	.020×.187	4.8(.189)	19.8(.780)	10.5(.413)	2.3	0.5(.020)	
	0.8×4.75	.032×.187					0.4(.016)	
	0.8×6.35	.032×.250	6.35(.250)	21.8(.858)				
4-6 (12-10)	0.8×6.35	.032×.250	6.35(.250)	24.0(.945)	13.0(.512)	3.4	0.4(.016)	