




## PU Two-Row Coil Hose

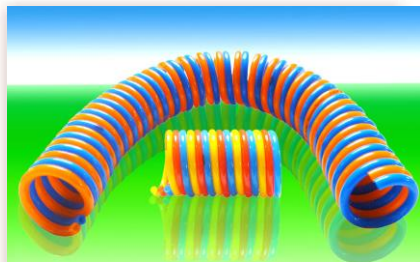

### Product Characteristic:

- Good elasticity, it's easy to operate, saves the space.
- Absorbing impact and reduces the pipeline to rub.
- Custom-made specification and size are doable.
- Working Temperature: approximately—20°C——+70°C。
- Conform to the ROHS environmental protection requirement.
- After being separated the tube still could maintain the smooth tube surface, guranteed that with base sealing property with joint.

### Product Use:

- Industry robot.
- Transport water and other liquid.
- Being used for automobile, engine, other product transportation.

### Datasheet:

Item No.	Metric Measurement						Working Pressure	Disruptive Pressure
	I.D.	O.D.	Length					
	mm	mm	M				Kgf/cm2	Kgf/cm2
TUTRC0640	4.0	6.0	6.0	9.0	12.0	15.0	15.0	65.0
TUTRC0855	5.5	8.0	6.0	9.0	12.0	15.0	15.0	65.0
TUTRC1065	6.5	10.0	6.0	9.0	12.0	15.0	15.0	65.0
TUTRC1280	8.0	12.0	6.0	9.0	12.0	15.0	15.0	65.0