




PVC 5 & 7 Core Auto Cable BS 6862

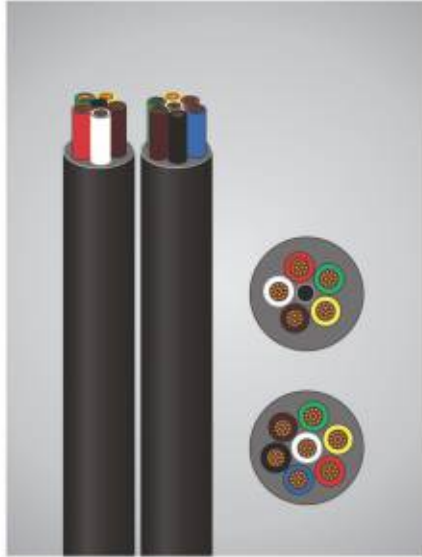

PVC 5 Core Auto Cables

Manufactured in accordance with BS 6862 Part1 1971, where applicable.
Plain copper conductors
PVC insulated and sheathed 70°C.

PVC 7 Core Auto Cables

Manufactured in accordance with BS 6862 Part1 1971, where applicable.
Plain copper conductors
PVC insulated and sheathed 70°C.

Specifications of PVC Auto Cable BS 6862 (5 Core)

Conductor Specification (mm)	Conductor Cross Section mm ² (AWG)	Current Rating (Amps)	Overall Diameter of Cables (mm)	Sheath Colours	Core Colours
5 x 9/0.30	5 x 0.65 (19)	5.75	8.3	Black	Brown Green
5 x 14/0.30	5 x 1.0 (17)	8.75	8.9	Black	Red White
4 x 21/0.30	4 x 1.0 (17)	8.75	9.8	Black	Yellow
1 x 28/0.30	1 x 2.0 (14)	17.5			

Specifications of PVC Auto Cable BS 6862 (7 Core)

Conductor Specification (mm)	Conductor Cross Section mm ² (AWG)	Current Rating (Amps)	Overall Diameter of Cables (mm)	Sheath Colours	Core Colours
7 x 16/0.20	7 x 0.5 (20)	4.25	8.5	Black	Black
7 x 9/0.30	7 x 0.65 (19)	5.75	9.0	Black	Red
6 x 9/0.30	6 x 0.65 (19)	6 x 5.75	9.2	Black	Green
1 x 14/0.30	1 x 1.0 (17)	1 x 8.75			Yellow
6 x 14/0.30	6 x 1.0 (17)	6 x 8.75	10.2	Black	Brown
1 x 28/0.30	1 x 2.5 (14)	1 x 17.5			White
6 x 21/0.30	6 x 1.5 (15)	6 x 12.75	11.2	Grey	Blue
1 x 35/0.30	1 x 2.5 (13)	1 x 21.75			

*Available in difference colors, lengths, wound on card board, Plastic (Shatter Proof Material) or Wooden Reels.