




## PVC 2 Core Auto Cable BS 6862

(Flat Twins & Round Twins)

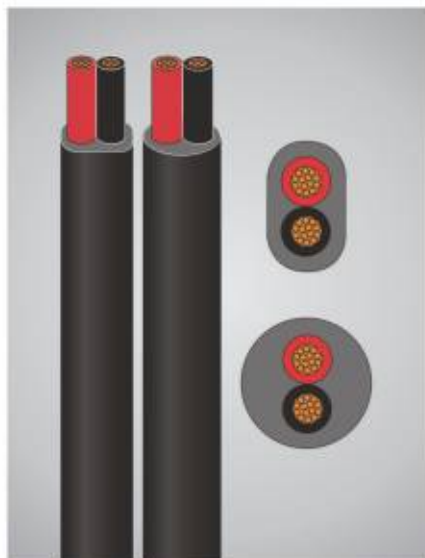

### PVC 2 Core Auto Cables (Flat Twins)

Manufactured in accordance with  
BS 6862 Part 1 1971, where applicable.  
Plain copper conductors  
PVC insulated and sheathed 70°C.

### PVC 2 Core Auto Cables (Round Twins)

Manufactured in accordance with  
BS 6862 Part 1 1971, where applicable.  
Plain copper conductors  
PVC insulated and sheathed 70°C.

### Specifications of PVC Auto Cable BS 6862 (2 Core Flat Twins)

Conductor Specification (mm)	Conductor Cross Section mm <sup>2</sup> (AWG)	Current Rating (Amps)	Maximum Overall Dimensions (mm)
2 x 9/0.30	2 x 0.65 (19)	5.75	6.1 x 3.8
2 x 14/0.30	2 x 1.0 (17)	8.75	6.5 x 4.0
2 x 21/0.30	2 x 1.5 (15)	12.75	7.0 x 4.1
2 x 28/0.30	2 x 2.0 (14)	17.75	7.9 x 4.8
2 x 35/0.30	2 x 2.5 (13)	21.75	8.8 x 5.2
2 x 44/0.30	2 x 3.0 (12)	27.5	9.5 x 5.7
2 x 65/0.30	2 x 4.5 (11)	35.0	11.9 x 7.0

Sheath Colours Available in Black, Red & White Core Colours Available in Black-White, Black-Yellow, Brown-White, Red-Black & Red-White. Please Contact us for Availability.

### Specifications of PVC Auto Cable BS 6862 (2 Core Round Twins)

Conductor Specification (mm)	Conductor Cross Section mm <sup>2</sup> (AWG)	Current Rating (Amps)	Overall Diameter of Cables (mm)	Sheath Colours	Core Colours
2 x 9/0.30	2 x 0.65 (19)	5.75	6.5	Black	Black
2 x 14/0.30	2 x 1.0 (17)	8.75	7.0	Black	Red
2 x 28/0.30	2 x 2.0 (14)	17.5	8.3	Black	

\*Available in difference colors, lengths, wound on card board, Plastic (Shatter Proof Material) or Wooden Reels.